

EMC REPORT

Applicant: SHENZHEN WLINK TECHNOLOGY CO., LIMITED

Address of Applicant: 319, YiBen Electronic Business Building, NO.1063 ChaGuang Road, XiLi, NanShan District, ShenZhen, China

Manufacturer/Factory: SHENZHEN WLINK TECHNOLOGY CO., LIMITED

Address of Manufacturer/Factory: 319, YiBen Electronic Business Building, NO.1063 ChaGuang Road, XiLi, NanShan District, ShenZhen, China

Equipment Under Test (EUT)

Product Name: Industrial 3G/4G Router

Model No.: WL-G510

Applicable standards: Draft ETSI EN 301 489-1 V2.2.0 (2017-03)
Draft ETSI EN 301 489-17 V3.2.0 (2017-03)
Draft ETSI EN 301 489-52 V1.1.0 (2016-11)
Final draft ETSI EN 301 489-3 V2.1.1 (2017-03)
EN 55032:2015
EN 55035:2017
EN 61000-3-2:2014
EN 61000-3-3:2013

Date of sample receipt: July 27, 2018

Date of Test: July 28-August 05, 2018

Date of report issue: August 06, 2018

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

The CE mark as shown below can be used, under the responsibility of the manufacturer, after completion of an EC Declaration of Conformity and compliance with all relevant EC Directives. The protection requirements with respect to electromagnetic compatibility contained in Directive 2014/53/EU are considered.



Robinson Lo
Laboratory Manager



This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	August 06, 2018	Original

Prepared By:

Bill. yuan

Date:

August 06, 2018

Project Engineer

Check By:

Andy. wa

Date:

August 06, 2018

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 OPERATING MODES	6
5.3 DESCRIPTION OF SUPPORT UNITS	6
5.4 TEST FACILITY	6
5.5 TEST LOCATION	6
5.6 DEVIATION FROM STANDARDS	6
5.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	6
5.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	6
6 EQUIPMENT USED DURING TEST	7
7 EMC REQUIREMENTS SPECIFICATION IN ETSI EN 301 489-17/-52/-3, EN55032	10
7.1 EMI (EMISSION)	10
7.1.1 Radiated Emission	10
7.1.2 Conducted Emissions	16
7.1.3 Harmonics Test Results.....	25
7.1.4 Flicker Test Results	25
7.2 IMMUNITY	26
7.2.1 Electrostatic Discharge	28
7.2.2 Radiated Immunity	30
7.2.3 Radio frequency common mode	32
7.2.4 Electrical Fast Transients	34
7.2.5 Surge.....	36
7.2.6 Voltage Dip and Voltage Interruptions	38
8 TEST SETUP PHOTO	40
9 EUT CONSTRUCTIONAL DETAILS	43

4 Test Summary

EMI Test				
Test Item	Test Requirement	Test Method	Application	Result
Radiated Emission	ETSI EN 301 489-17/52 EN 55032	ETSI EN301 489-1	Enclosure	Pass
Conducted Emission	ETSI EN 301 489-17/52 EN 55032	ETSI EN301 489-1	AC port	Pass
Harmonic Current Emissions	ETSI EN 301 489-17/52 EN 61000-3-2	ETSI EN301 489-1 EN 61000-3-2	AC port	N/A
Voltage Fluctuations and Flicker	ETSI EN 301 489-17/52 EN 61000-3-3	ETSI EN301 489-1 EN 61000-3-2	AC port	Pass
EMS Test				
ESD (Electrostatic Discharge)	ETSI EN 301 489-17/52 EN 55035	EN 61000-4-2	Enclosure	Pass
Radio frequency electromagnetic field (80 MHz to 6 000 MHz)	ETSI EN 301 489-17/52 EN 55035	EN 61000-4-3	Enclosure	Pass
EFT (Electrical Fast Transients)	ETSI EN 301 489-17/52 EN 55035	EN 61000-4-4	AC port	Pass
Surge Immunity	ETSI EN 301 489-17/52 EN 55035	EN 61000-4-5	AC port	Pass
Radio frequency, common mode	ETSI EN 301 489-17/52 EN 55035	EN 61000-4-6	AC port	Pass
Voltage Dips and Interruptions	ETSI EN 301 489-17/52 EN 55035	EN 61000-4-11	AC port	Pass

Remark:

Pass: The EUT complies with the essential requirements in the standard.

N/A: Not applicable

5 General Information

5.1 General Description of EUT

Product Name:	Industrial 3G/4G Router
Model No.:	WL-G510
Operation Frequency:	WIFI: 2412MHz~2472MHz (802.11b/802.11g/802.11n(HT20) @ 2.4G band) 2422MHz~2462MHz (802.11n(H40) @ 2.4G band) 5180MHz~5240MHz (802.11ac(HT20,HT40,HT80) @ 5G band) 5745MHz ~ 5825MHz @ 5.8G band WCDMA/HSDPA/HSUPA/HSPA: Band 1/2/5/8 FDD LTE: Band 1/2/3/5/7/8/20 TDD LTE: Band 38/39/40/41
Modulation Type:	WCDMA:QPSK HSDPA/HSUPA/HSPA:QPSK, 16QAM LTE: QPSK, 16QAM, 64QAM WIFI: DSSS, OFDM
Antenna Type:	External Antenna
Antenna gain:	Main Antenna: 3.00dBi (Max.), for TX/RX (WIFI) Aux Antenna: 3.00dBi(Max.), for TX/RX (WIFI) Main Antenna: 5.00dBi (Max.), for TX/RX (LTE) Aux Antenna: 5.00dBi(Max.), for TX/RX (LTE)
Power Supply:	Adapter: Model: TS-A018-120015EJ Input: AC 100-240V, 50/60Hz, 0.6A Output: DC 12V, 1.5A

5.2 Operating Modes

Operating mode	Detail description
LAN mode	Keep the EUT in LAN mode.
WIFI mode	Keep the EUT in play internet information by WIFI network.
Traffic mode (UTRA-FDD)	Link+ Adapter (The EUT shall be commanded to operate at maximum transmit power.)
Idle mode (UTRA-FDD)	Idle+ Adapter (The EUT was registered in the mentioned band.)
Traffic mode (E-UTRA)	Link+ Adapter (The EUT shall be commanded to operate at maximum transmit power.)
Idle mode (E-UTRA)	Idle+ Adapter (The EUT was registered in the mentioned band.)

5.3 Description of Support Units

None.

5.4 Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> ● FCC—Registration No.: 381383 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383, January 08, 2018. ● Industry Canada (IC) —Registration No.: 9079A-2 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. Has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016.

5.5 Test Location

RI test was performed at:
SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab, No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.
All other tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China Tel: 0755-27798480 Fax: 0755-27798960

5.6 Deviation from Standards

None.

5.7 Abnormalities from Standard Conditions

None.

5.8 Other Information Requested by the Customer

None.

6 Equipment Used during Test

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 27 2018	June. 26 2019
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 27 2018	June. 26 2019
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 27 2018	June. 26 2019
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 27 2018	June. 26 2019
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 27 2018	June. 26 2019
9	Coaxial Cable	GTS	N/A	GTS211	June. 27 2018	June. 26 2019
10	Coaxial cable	GTS	N/A	GTS210	June. 27 2018	June. 26 2019
11	Coaxial Cable	GTS	N/A	GTS212	June. 27 2018	June. 26 2019
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 27 2018	June. 26 2019
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 27 2018	June. 26 2019
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 27 2018	June. 26 2019
15	Band filter	Amindeon	82346	GTS219	June. 27 2018	June. 26 2019
16	Power Meter	Anritsu	ML2495A	GTS540	June. 27 2018	June. 26 2019
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 27 2018	June. 26 2019
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 27 2018	June. 26 2019
19	Splitter	Agilent	11636B	GTS237	June. 27 2018	June. 26 2019
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 27 2018	June. 26 2019

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 27 2018	June. 26 2019
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 27 2018	June. 26 2019
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June. 27 2018	June. 26 2019
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 27 2018	June. 26 2019
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 27 2018	June. 26 2019

ESD						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	ESD Simulator	KIKUSUI	KES4021A	GTS242	June. 27 2018	June. 26 2019
2	Thermo meter	KTJ	TA328	GTS243	June. 27 2018	June. 26 2019

Conducted Immunity						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Signal Generator	ROHDE & SCHWARZ	SMB 100A	GTS553	June. 27 2018	June. 26 2019
2	CDN	LionCEL	CDN-M3-16	GTS554	June. 27 2018	June. 26 2019
3	CDN	CYBERTEK	EM 5070	GTS559	June. 27 2018	June. 26 2019
4	Power amplifier	rflight	NTWPA-00010475	GTS555	June. 27 2018	June. 26 2019
5	ATT	SUNWAVE	SJ-50-06DB	GTS556	June. 27 2018	June. 26 2019
6	Clamp	SCHAFFNER	KEMZ 801	GTS558	June. 27 2018	June. 26 2019

Harmonic/ Flicker						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Power Analyzer H/F	EMTEST	DPA500	GTS235	June. 27 2018	June. 26 2019
2	AC POWER SUPPLY	EMTEST	ACS500	GTS236	June. 27 2018	June. 26 2019
3	Thermo meter	KTJ	TA328	GTS256	June. 27 2018	June. 26 2019

EFT, Surge, Voltage dips and Interruption						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	EMTEST system	EMTEST	UCS500N	GTS239	June. 27 2018	June. 26 2019
2	Clamp	EMTEST	HFK	GTS557	June. 27 2018	June. 26 2019
3	Thermo meter	KTJ	TA328	GTS238	June. 27 2018	June. 26 2019



Radiated Immunity (80MHz-6GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Fully-Anechoic Chamber 2	Chang Zhou Zhong Shuo	854	SEM001-05	2017-05-10	2020-05-09
Measurement Software	Rohde & Schwarz	EMC32 V9.25.00	N/A	N/A	N/A
Signal Generator	Rohde & Schwarz	SMB100A	SEM006-11	2018-04-02	2019-04-01
Broadband Amplifier(80MHz-1GHz)	Rohde & Schwarz	BBA150-BC250	SEM005-12	2017-09-27	2018-09-26
Broadband Amplifier(800MHz-3GHz)	Rohde & Schwarz	BBA150-D110	SEM005-13	2018-04-02	2019-04-01
Broadband Amplifier(2.5GHz-6GHz)	Rohde & Schwarz	BBA150-E60	SEM005-16	2018-04-13	2019-04-12
Power Sensor	Rohde & Schwarz	NRP-Z91	SEM009-09	2018-04-02	2019-04-01
Stacked Log.-Per.-Broadband Antenna(70MHz-10GHz)	Schwarzbeck	STLP 9129	SEM003-25	N/A	N/A
Amplifier(10kHz-250MHz)	Amplifier Research	75A250A	SEM005-11	2018-04-02	2019-04-01
Universal Radio Communication Tester	Rohde & Schwarz	CMU 200	SEM010-01	2017-09-27	2018-09-26
Universal Radio Communication Tester	Rohde & Schwarz	CMW 500	SEM010-03	2018-04-02	2019-04-01
Conditioning Amplifier	Brüel & Kjaer	2690-OS2	SEM005-10	2018-04-20	2019-04-19
Mouth Simulator	Brüel & Kjaer	4227	SEM017-01	2018-04-10	2019-04-09
Signal Source	Brüel & Kjaer	4231	SEM017-02	2018-04-14	2019-04-13
Audio Analyzer	Rohde & Schwarz	UPV	SEM008-03	2017-09-27	2018-09-26

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 27 2018	June. 26 2019
2	Barometer	ChangChun	DYM3	GTS255	June. 27 2018	June. 26 2019

7 EMC Requirements Specification in ETSI EN 301 489-17/-52/-3, EN55032

7.1 EMI (Emission)

7.1.1 Radiated Emission

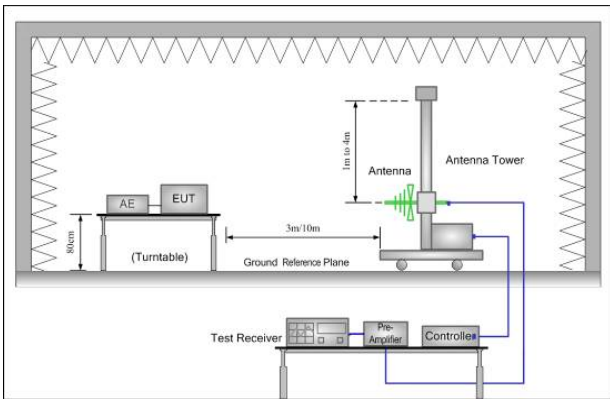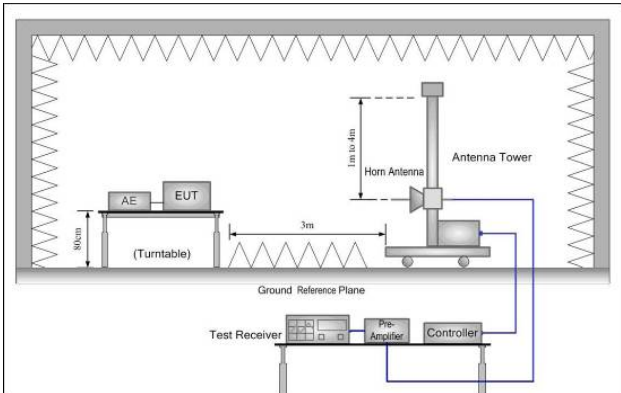Test Requirement:	ETSI EN 301 489-17/-52/-3,EN55032				
Test Method:	ETSI EN 301 489-1 and EN55016-2-3				
Test Frequency Range:	30MHz to 6GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		AV	1MHz	3MHz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-230MHz		40.00		Quasi-peak Value
	230MHz-1GHz		47.00		Quasi-peak Value
	1GHz-3GHz		50.00		Average Value
			70.00		Peak Value
	3GHz-6GHz		54.00		Average Value
74.00			Peak Value		
Test setup:	Below 1GHz				
					
Test setup:	Above 1GHz				
					

Test Procedure:	<p>■ From 30MHz to 1GHz:</p> <ol style="list-style-type: none"> 1. The radiated emissions test was conducted in a semi-anechoic chamber. 2. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation. 3. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT. 4. The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization. <p>■ Above 1GHz:</p> <ol style="list-style-type: none"> 1. The radiated emissions test was conducted in a fully-anechoic chamber. 2. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation. 3. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emission spectrum plots of the EUT. 4. The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization. 					
Test environment:	Temp.:	25 °C	Humid.:	50%	Press.:	1 010mbar
Measurement Record:	Uncertainty: ± 4.5dB					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details. Only show test data of the worse mode on the test report.					
Test results:	Pass					

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Measurement Data(worst case)
Below 1GHz
UTRA-FDD Mode

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarity
87.42	52.96	9.81	1.09	36.62	27.24	40.00	-12.76	Vertical
96.10	54.73	11.65	1.16	36.69	30.85	40.00	-9.15	Vertical
119.44	55.16	9.58	1.36	36.88	29.22	40.00	-10.78	Vertical
236.65	53.08	11.71	2.05	37.37	29.47	47.00	-17.53	Vertical
293.08	52.60	13.42	2.32	37.41	30.93	47.00	-16.07	Vertical
501.18	53.91	17.30	3.31	37.51	37.01	47.00	-9.99	Vertical
107.89	46.74	11.31	1.26	36.79	22.52	40.00	-17.48	Horizontal
125.01	51.14	8.81	1.40	36.92	24.43	40.00	-15.57	Horizontal
198.59	51.93	10.31	1.83	37.32	26.75	40.00	-13.25	Horizontal
234.17	56.70	11.64	2.04	37.37	33.01	47.00	-13.99	Horizontal
266.61	57.07	12.65	2.21	37.39	34.54	47.00	-12.46	Horizontal
316.59	55.78	13.93	2.45	37.44	34.72	47.00	-12.28	Horizontal

E-UTRA Mode

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarity
32.75	51.52	11.26	0.58	35.20	28.16	40.00	-11.84	Vertical
99.88	55.89	12.20	1.19	36.72	32.56	40.00	-7.44	Vertical
138.87	57.49	7.49	1.50	37.01	29.47	40.00	-10.53	Vertical
197.89	53.98	10.31	1.83	37.32	28.80	40.00	-11.20	Vertical
280.02	54.82	13.05	2.27	37.40	32.74	47.00	-14.26	Vertical
510.04	50.06	17.52	3.35	37.51	33.42	47.00	-13.58	Vertical
35.75	41.39	11.46	0.62	35.41	18.06	40.00	-21.94	Horizontal
86.20	45.56	9.43	1.08	36.60	19.47	40.00	-20.53	Horizontal
147.40	53.16	7.56	1.55	37.06	25.21	40.00	-14.79	Horizontal
188.41	52.80	9.73	1.78	37.28	27.03	40.00	-12.97	Horizontal
250.30	58.11	12.18	2.12	37.38	35.03	47.00	-11.97	Horizontal
501.18	47.95	17.30	3.31	37.51	31.05	47.00	-15.95	Horizontal

LAN Mode

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarity
96.10	53.40	11.65	1.16	36.69	29.52	40.00	-10.48	Vertical
104.17	53.15	11.73	1.23	36.76	29.35	40.00	-10.65	Vertical
234.17	54.02	11.64	2.04	37.37	30.33	47.00	-16.67	Vertical
307.83	52.26	13.76	2.40	37.43	30.99	47.00	-16.01	Vertical
501.18	52.10	17.30	3.31	37.51	35.20	47.00	-11.80	Vertical
533.83	54.95	18.07	3.46	37.52	38.96	47.00	-8.04	Vertical
125.01	52.66	8.81	1.40	36.92	25.95	40.00	-14.05	Horizontal
151.07	53.51	7.70	1.58	37.08	25.71	40.00	-14.29	Horizontal
233.35	55.66	11.60	2.04	37.36	31.94	47.00	-15.06	Horizontal
261.98	57.20	12.55	2.18	37.39	34.54	47.00	-12.46	Horizontal
312.18	56.62	13.85	2.42	37.43	35.46	47.00	-11.54	Horizontal
501.18	47.11	17.30	3.31	37.51	30.21	47.00	-16.79	Horizontal

WIFI Mode

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarity
32.41	51.73	11.25	0.58	35.18	28.38	40.00	-11.62	Vertical
87.42	54.22	9.81	1.09	36.62	28.50	40.00	-11.50	Vertical
121.98	55.18	9.19	1.38	36.89	28.86	40.00	-11.14	Vertical
197.89	55.14	10.31	1.83	37.32	29.96	40.00	-10.04	Vertical
277.09	54.90	12.98	2.25	37.40	32.73	47.00	-14.27	Vertical
875.25	41.53	22.09	4.76	37.60	30.78	47.00	-16.22	Vertical
35.50	41.23	11.42	0.61	35.39	17.87	40.00	-22.13	Horizontal
86.81	45.06	9.68	1.08	36.61	19.21	40.00	-20.79	Horizontal
109.80	48.77	11.10	1.28	36.80	24.35	40.00	-15.65	Horizontal
197.20	54.41	10.26	1.82	37.32	29.17	40.00	-10.83	Horizontal
271.33	58.59	12.80	2.23	37.40	36.22	47.00	-10.78	Horizontal
533.83	47.51	18.07	3.46	37.52	31.52	47.00	-15.48	Horizontal

Above 1GHz

UTRA-FDD Mode

Peak measurement

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarity
1080.00	44.55	24.70	4.37	32.89	40.73	70.00	-29.27	Vertical
1835.00	44.75	25.45	4.88	34.17	40.91	70.00	-29.09	Vertical
2840.00	39.35	28.39	5.79	33.51	40.02	70.00	-29.98	Vertical
3870.00	35.57	29.47	7.64	32.33	40.35	74.00	-33.65	Vertical
4950.00	35.29	31.91	8.71	32.16	43.75	74.00	-30.25	Vertical
5835.00	33.49	32.70	9.97	32.23	43.93	74.00	-30.07	Vertical
1220.00	44.69	25.43	4.48	33.13	41.47	70.00	-28.53	Horizontal
2015.00	43.05	26.20	4.97	34.44	39.78	70.00	-30.22	Horizontal
2960.00	40.10	28.44	5.89	33.37	41.06	70.00	-28.94	Horizontal
4070.00	35.16	29.83	7.94	32.09	40.84	74.00	-33.16	Horizontal
5165.00	34.61	32.04	9.01	32.26	43.40	74.00	-30.60	Horizontal
5680.00	34.34	32.44	9.77	32.33	44.22	74.00	-29.78	Horizontal

E-UTRA Mode

Peak measurement

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarity
1045.00	43.92	24.61	4.33	32.84	40.02	70.00	-29.98	Vertical
1915.00	44.09	25.81	4.92	34.32	40.50	70.00	-29.50	Vertical
3045.00	40.90	28.65	6.02	33.28	42.29	74.00	-31.71	Vertical
4150.00	35.36	30.06	8.01	32.01	41.42	74.00	-32.58	Vertical
5260.00	34.64	31.79	9.15	32.31	43.27	74.00	-30.73	Vertical
5930.00	32.87	32.80	10.11	32.17	43.61	74.00	-30.39	Vertical
1135.00	44.63	24.91	4.41	32.98	40.97	70.00	-29.03	Horizontal
1700.00	43.84	24.98	4.80	33.94	39.68	70.00	-30.32	Horizontal
2710.00	41.03	28.18	5.68	33.64	41.25	70.00	-28.75	Horizontal
3975.00	36.42	29.64	7.81	32.21	41.66	74.00	-32.34	Horizontal
5065.00	34.84	32.01	8.85	32.21	43.49	74.00	-30.51	Horizontal
5730.00	33.44	32.53	9.83	32.29	43.51	74.00	-30.49	Horizontal

LAN Mode

Peak measurement

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarity
1065.00	44.28	24.66	4.35	32.87	40.42	70.00	-29.58	Vertical
1695.00	44.33	24.97	4.80	33.94	40.16	70.00	-29.84	Vertical
2335.00	40.48	27.77	5.32	34.07	39.50	70.00	-30.50	Vertical
3355.00	38.41	28.48	6.68	32.91	40.66	74.00	-33.34	Vertical
4290.00	34.93	30.65	8.15	31.84	41.89	74.00	-32.11	Vertical
5835.00	33.49	32.70	9.97	32.23	43.93	74.00	-30.07	Vertical
1130.00	43.94	24.89	4.41	32.98	40.26	70.00	-29.74	Horizontal
1560.00	45.28	25.07	4.72	33.71	41.36	70.00	-28.64	Horizontal
2235.00	40.83	28.00	5.22	34.19	39.86	70.00	-30.14	Horizontal
3185.00	38.88	28.76	6.33	33.10	40.87	74.00	-33.13	Horizontal
4190.00	37.74	30.18	8.05	31.96	44.01	74.00	-29.99	Horizontal
5780.00	33.78	32.61	9.90	32.26	44.03	74.00	-29.97	Horizontal

WIFI Mode

Peak measurement

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarity
1195.00	43.79	25.33	4.46	33.07	40.51	70.00	-29.49	Vertical
1805.00	44.88	25.29	4.86	34.11	40.92	70.00	-29.08	Vertical
2470.00	40.30	27.50	5.46	33.94	39.32	70.00	-30.68	Vertical
3125.00	37.90	28.82	6.19	33.18	39.73	74.00	-34.27	Vertical
4080.00	36.98	29.86	7.94	32.09	42.69	74.00	-31.31	Vertical
5680.00	34.34	32.44	9.77	32.33	44.22	74.00	-29.78	Vertical
1285.00	43.72	25.60	4.53	33.24	40.61	70.00	-29.39	Horizontal
1920.00	44.26	25.84	4.92	34.32	40.70	70.00	-29.30	Horizontal
2625.00	40.35	27.88	5.60	33.74	40.09	70.00	-29.91	Horizontal
3495.00	37.10	28.96	6.95	32.75	40.26	74.00	-33.74	Horizontal
4485.00	34.71	31.29	8.32	31.93	42.39	74.00	-31.61	Horizontal
5495.00	33.88	31.98	9.49	32.42	42.93	74.00	-31.07	Horizontal

Remark:


1. The EUT was test at 3m in field chamber.
2. If the average limit is met when using a Peak detector, the EUT shall be deemed to meet both peak and average limits. And measurement with the average detector is unnecessary.

7.1.2 Conducted Emissions

Test Requirement:	ETSI EN 301 489-17/-52/-3,EN55032																		
Test Method:	ETSI EN 301 489-1																		
Test Frequency Range:	150kHz to 30MHz																		
Class / Severity:	Class B																		
Receiver setup:	RBW=9kHz, VBW=30kHz																		
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> <p>* Decreases with the logarithm of the frequency.</p>					Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																		
	Quasi-peak	Average																	
0.15-0.5	66 to 56*	56 to 46*																	
0.5-5	56	46																	
5-30	60	50																	
Test setup:	<div><p style="text-align: center;">Reference Plane</p></div> <p><i>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</i></p>																		
Test procedure	<div><div>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment.</div><div>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs).</div><div>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to EN55032 Class B on conducted measurement.</div></div>																		
Test Instruments:	Temp.:	24 °C	Humid.:	51%	Press.: 1 010mbar														
Measurement Record:	Uncertainty: ± 3.45dB																		
Test Instruments:	Refer to section 6.0 for details																		
Test mode:	Refer to section 5.2 for details, Only show test data of the worse mode on the test report.																		
Test results:	Pass																		


UTRA-FDD Mode

Line:

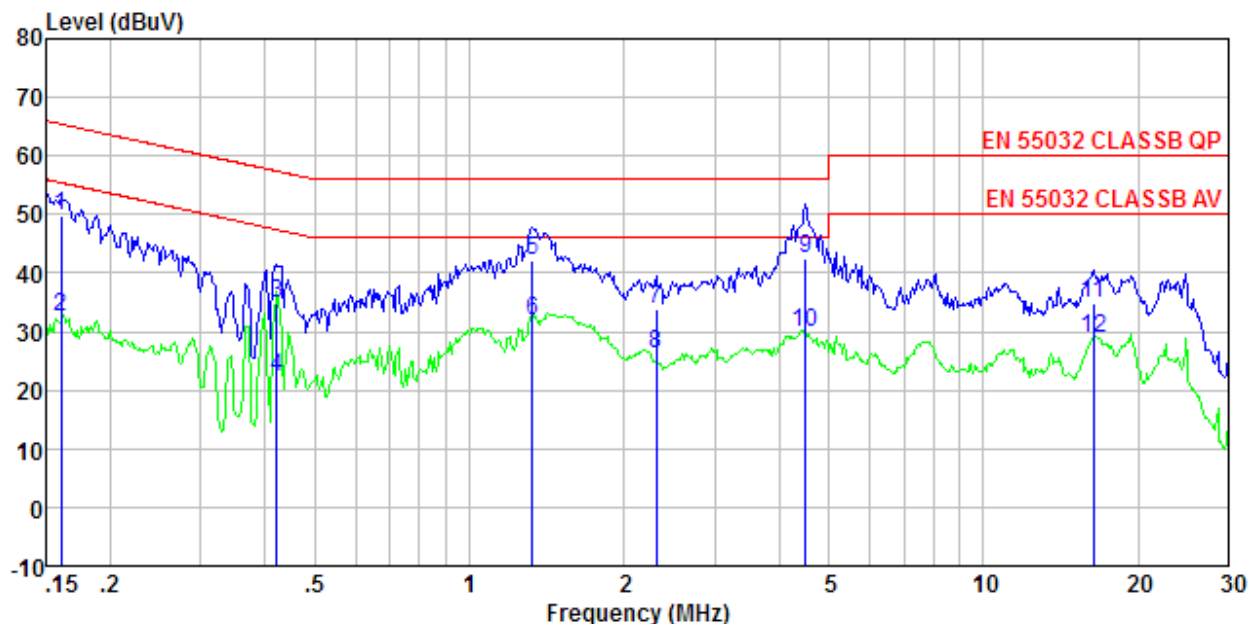

Freq MHz	Reading level dBuV	LIISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.161	49.46	0.40	0.08	49.94	65.43	-15.49	QP
0.161	31.97	0.40	0.08	32.45	55.43	-22.98	Average
0.421	34.25	0.34	0.11	34.70	57.42	-22.72	QP
0.421	21.85	0.34	0.11	22.30	47.42	-25.12	Average
1.324	41.70	0.20	0.16	42.06	56.00	-13.94	QP
1.324	31.33	0.20	0.16	31.69	46.00	-14.31	Average
2.309	33.42	0.20	0.18	33.80	56.00	-22.20	QP
2.309	25.82	0.20	0.18	26.20	46.00	-19.80	Average
4.501	41.95	0.20	0.17	42.32	56.00	-13.68	QP
4.501	29.44	0.20	0.17	29.81	46.00	-16.19	Average
16.398	34.29	0.23	0.22	34.74	60.00	-25.26	QP
16.398	28.30	0.23	0.22	28.75	50.00	-21.25	Average


Neutral:

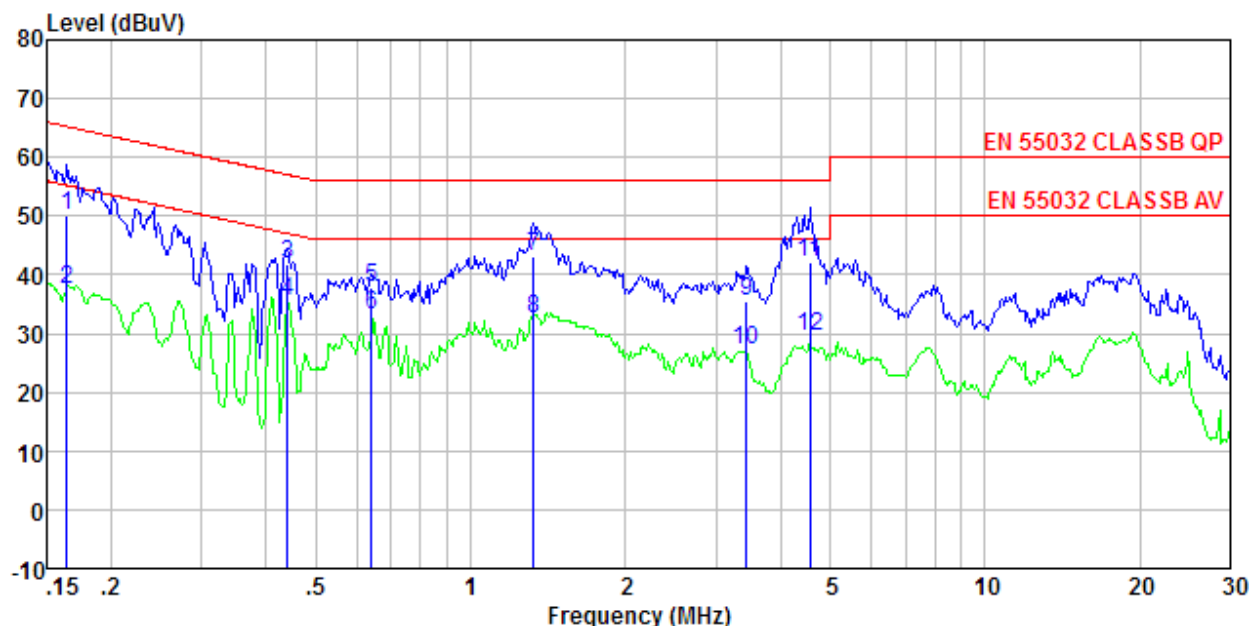

Freq MHz	Reading level dBuV	LIISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.164	49.77	0.40	0.08	50.25	65.25	-15.00	QP
0.164	36.99	0.40	0.08	37.47	55.25	-17.78	Average
0.440	41.33	0.34	0.11	41.78	57.07	-15.29	QP
0.440	34.93	0.34	0.11	35.38	47.07	-11.69	Average
0.641	37.47	0.27	0.12	37.86	56.00	-18.14	QP
0.641	32.69	0.27	0.12	33.08	46.00	-12.92	Average
1.324	42.93	0.20	0.16	43.29	56.00	-12.71	QP
1.324	32.27	0.20	0.16	32.63	46.00	-13.37	Average
3.436	35.11	0.20	0.18	35.49	56.00	-20.51	QP
3.436	26.74	0.20	0.18	27.12	46.00	-18.88	Average
4.574	41.86	0.20	0.17	42.23	56.00	-13.77	QP
4.574	29.07	0.20	0.17	29.44	46.00	-16.56	Average


E-UTRA Mode

Line:

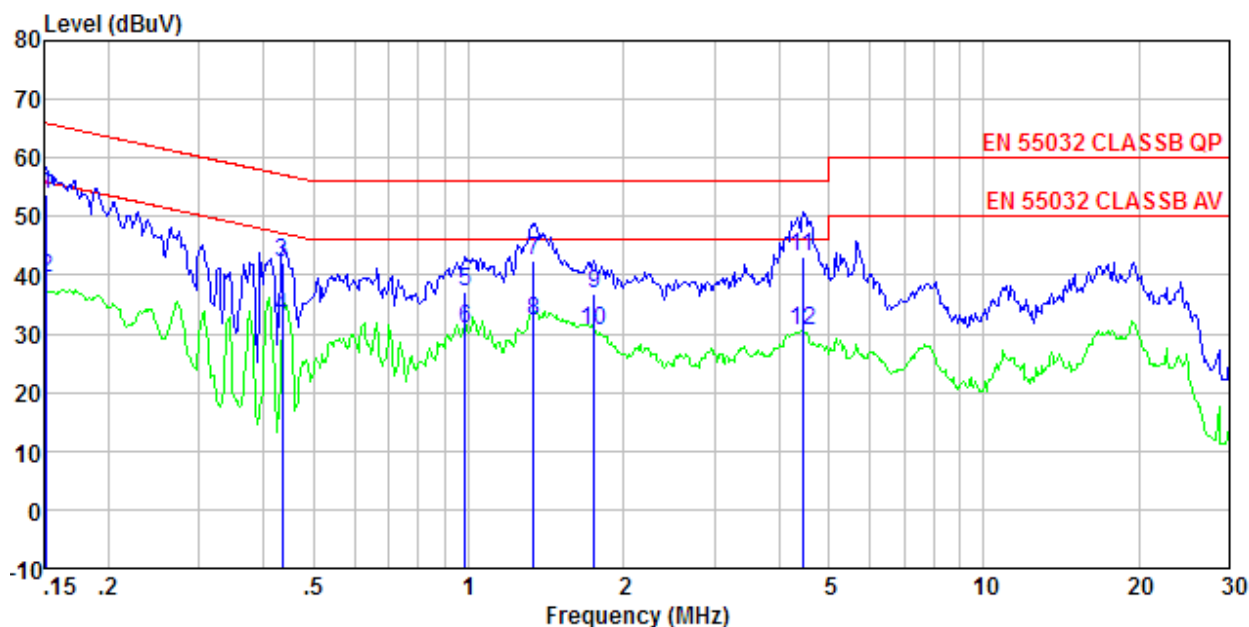

Freq MHz	Reading level dBuV	LIISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.152	53.16	0.40	0.07	53.63	65.91	-12.28	QP
0.152	38.91	0.40	0.07	39.38	55.91	-16.53	Average
0.435	41.79	0.34	0.11	42.24	57.15	-14.91	QP
0.435	32.36	0.34	0.11	32.81	47.15	-14.34	Average
0.984	36.89	0.20	0.15	37.24	56.00	-18.76	QP
0.984	30.38	0.20	0.15	30.73	46.00	-15.27	Average
1.338	42.12	0.20	0.16	42.48	56.00	-13.52	QP
1.338	31.91	0.20	0.16	32.27	46.00	-13.73	Average
1.753	36.62	0.20	0.17	36.99	56.00	-19.01	QP
1.753	30.16	0.20	0.17	30.53	46.00	-15.47	Average
4.454	42.73	0.20	0.17	43.10	56.00	-12.90	QP
4.454	30.22	0.20	0.17	30.59	46.00	-15.41	Average


Neutral:

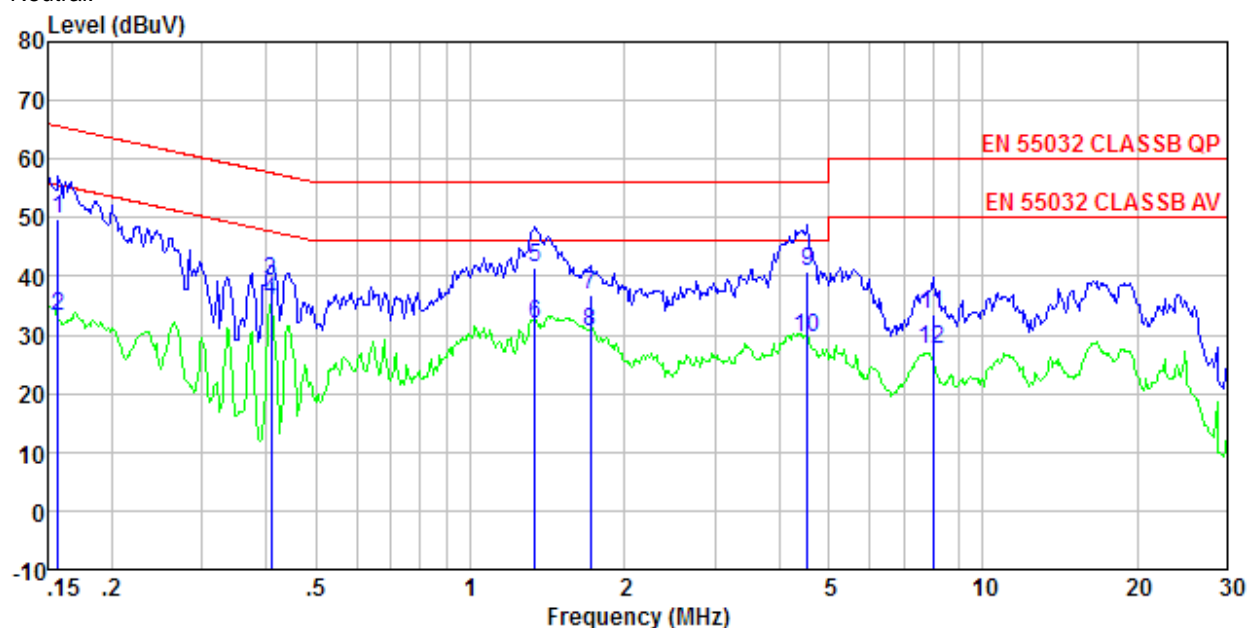

Freq MHz	Reading level dBuV	LIISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.157	49.29	0.40	0.08	49.77	65.60	-15.83	QP
0.157	32.66	0.40	0.08	33.14	55.60	-22.46	Average
0.408	38.81	0.35	0.11	39.27	57.68	-18.41	QP
0.408	35.21	0.35	0.11	35.67	47.68	-12.01	Average
1.338	41.16	0.20	0.16	41.52	56.00	-14.48	QP
1.338	31.52	0.20	0.16	31.88	46.00	-14.12	Average
1.716	36.35	0.20	0.17	36.72	56.00	-19.28	QP
1.716	30.22	0.20	0.17	30.59	46.00	-15.41	Average
4.549	40.45	0.20	0.17	40.82	56.00	-15.18	QP
4.549	29.15	0.20	0.17	29.52	46.00	-16.48	Average
7.977	33.12	0.20	0.19	33.51	60.00	-26.49	QP
7.977	27.06	0.20	0.19	27.45	50.00	-22.55	Average


LAN Mode

Line:

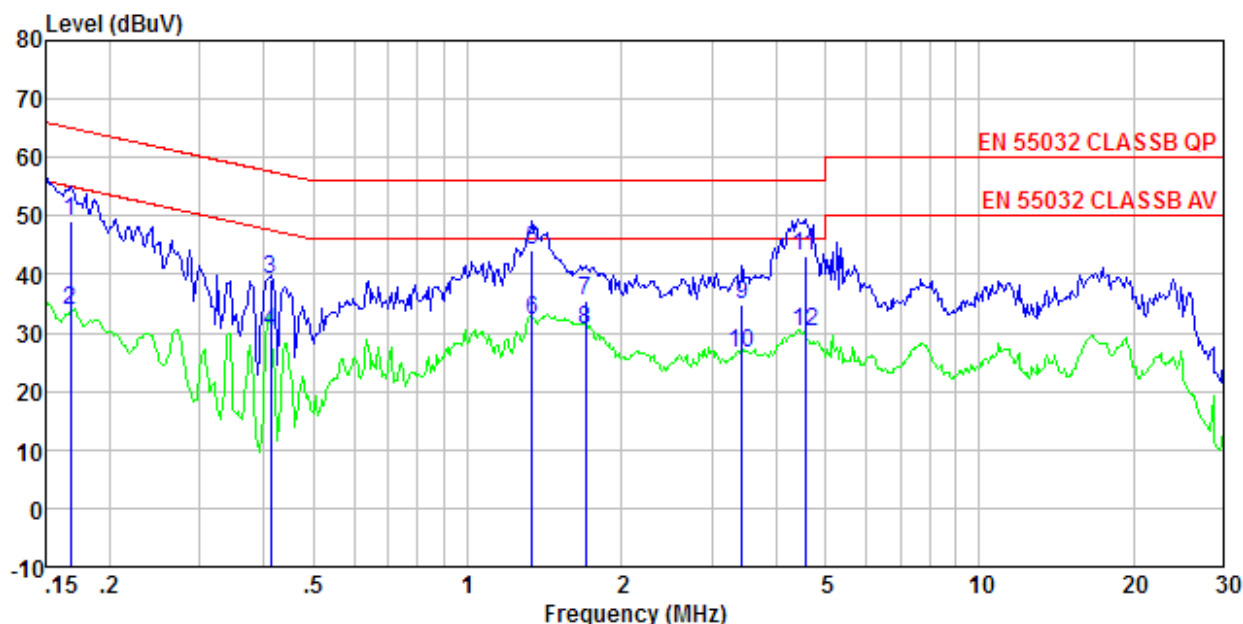

Freq MHz	Reading level dBuV	LIISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.168	48.78	0.40	0.09	49.27	65.08	-15.81	QP
0.168	33.49	0.40	0.09	33.98	55.08	-21.10	Average
0.413	38.62	0.35	0.11	39.08	57.59	-18.51	QP
0.413	29.83	0.35	0.11	30.29	47.59	-17.30	Average
1.338	43.74	0.20	0.16	44.10	56.00	-11.90	QP
1.338	31.96	0.20	0.16	32.32	46.00	-13.68	Average
1.698	35.27	0.20	0.17	35.64	56.00	-20.36	QP
1.698	30.09	0.20	0.17	30.46	46.00	-15.54	Average
3.436	34.39	0.20	0.18	34.77	56.00	-21.23	QP
3.436	26.29	0.20	0.18	26.67	46.00	-19.33	Average
4.574	42.61	0.20	0.17	42.98	56.00	-13.02	QP
4.574	29.84	0.20	0.17	30.21	46.00	-15.79	Average


Neutral:

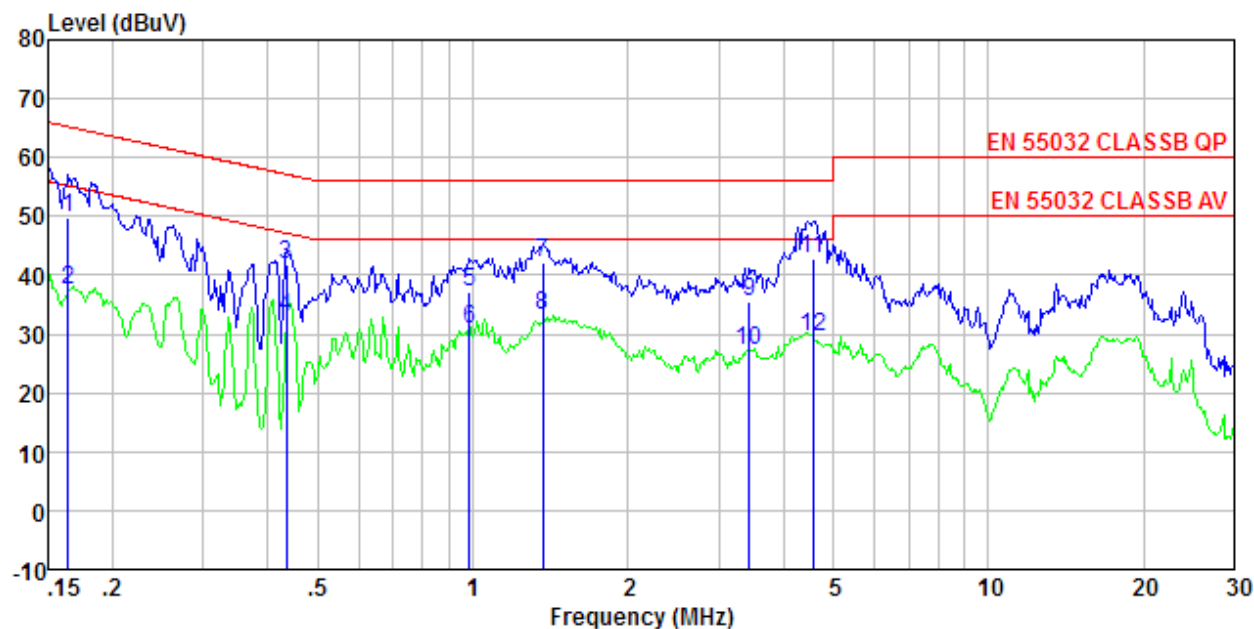

Freq MHz	Reading level dBuV	LIISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.164	49.24	0.40	0.08	49.72	65.25	-15.53	QP
0.164	37.01	0.40	0.08	37.49	55.25	-17.76	Average
0.435	41.45	0.34	0.11	41.90	57.15	-15.25	QP
0.435	32.25	0.34	0.11	32.70	47.15	-14.45	Average
0.984	36.90	0.20	0.15	37.25	56.00	-18.75	QP
0.984	30.41	0.20	0.15	30.76	46.00	-15.24	Average
1.367	41.77	0.20	0.16	42.13	56.00	-13.87	QP
1.367	32.92	0.20	0.16	33.28	46.00	-12.72	Average
3.436	35.04	0.20	0.18	35.42	56.00	-20.58	QP
3.436	26.97	0.20	0.18	27.35	46.00	-18.65	Average
4.574	42.55	0.20	0.17	42.92	56.00	-13.08	QP
4.574	29.23	0.20	0.17	29.60	46.00	-16.40	Average


WIFI Mode

Line:

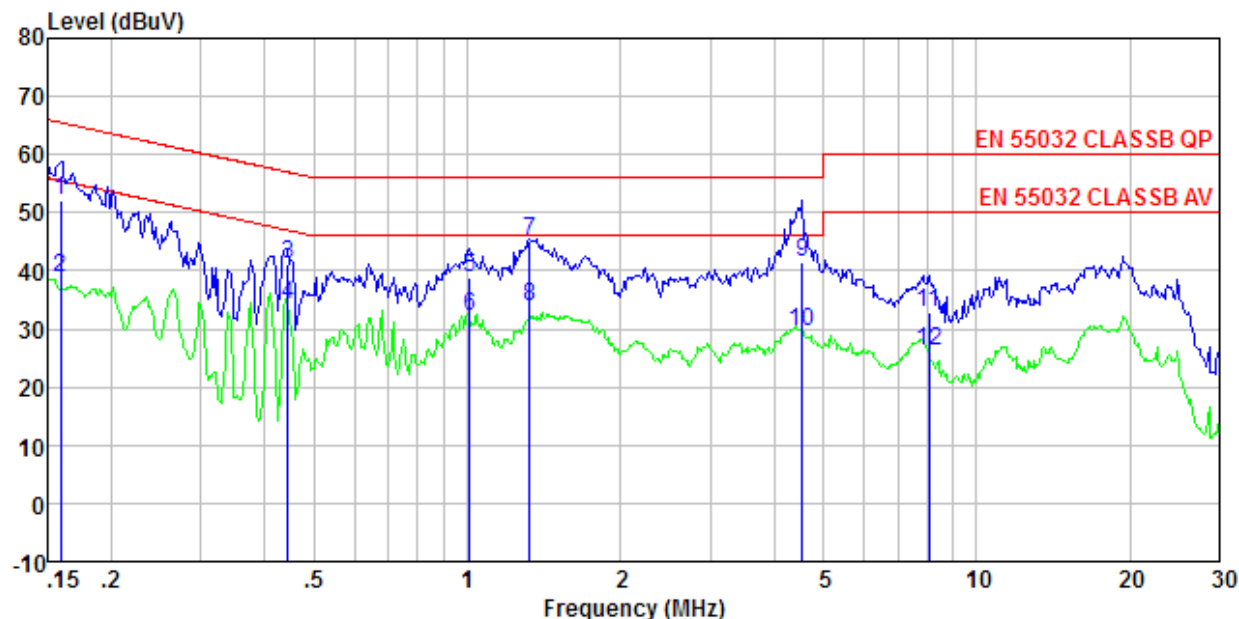

Freq MHz	Reading level dBuV	LIISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.159	51.74	0.40	0.08	52.22	65.52	-13.30	QP
0.159	38.33	0.40	0.08	38.81	55.52	-16.71	Average
0.444	40.77	0.33	0.11	41.21	56.98	-15.77	QP
0.444	33.75	0.33	0.11	34.19	46.98	-12.79	Average
1.010	38.55	0.20	0.15	38.90	56.00	-17.10	QP
1.010	31.74	0.20	0.15	32.09	46.00	-13.91	Average
1.324	44.73	0.20	0.16	45.09	56.00	-10.91	QP
1.324	33.36	0.20	0.16	33.72	46.00	-12.28	Average
4.549	41.21	0.20	0.17	41.58	56.00	-14.42	QP
4.549	29.30	0.20	0.17	29.67	46.00	-16.33	Average
8.062	32.29	0.20	0.19	32.68	60.00	-27.32	QP
8.062	25.82	0.20	0.19	26.21	50.00	-23.79	Average

Neutral:

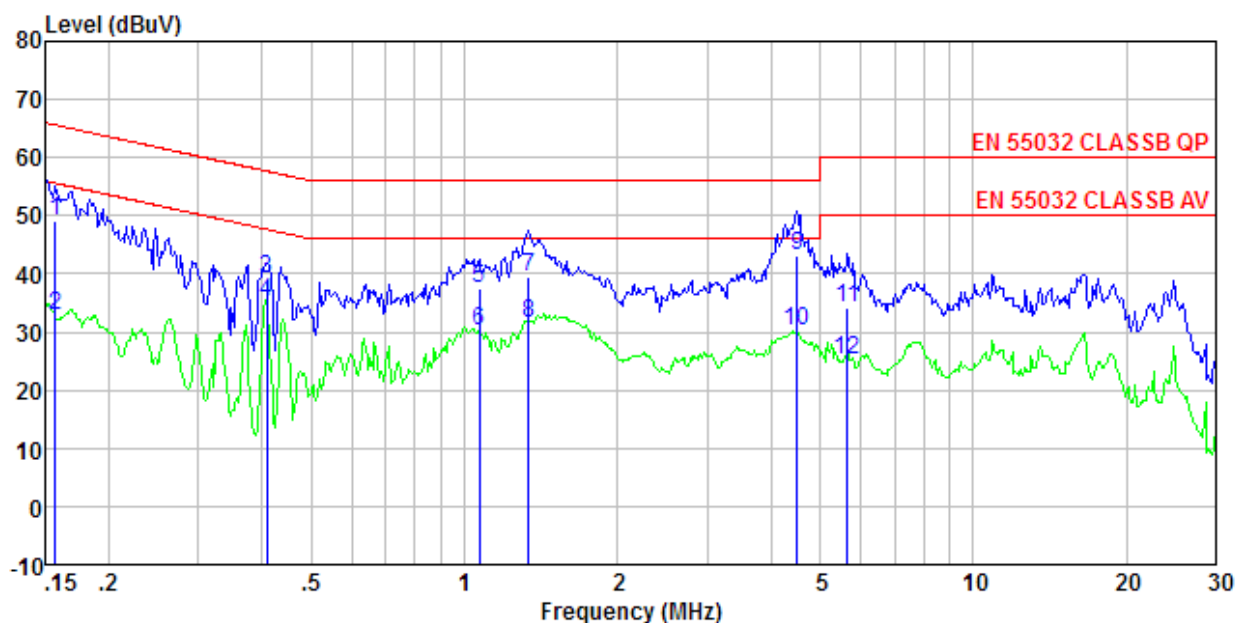

Freq MHz	Reading level dBUV	LISN/ISN factor dB	Cable loss dB	level dBUV	Limit level dBUV	Over limit dB	Remark
0.157	48.78	0.40	0.08	49.26	65.60	-16.34	QP
0.157	32.51	0.40	0.08	32.99	55.60	-22.61	Average
0.408	38.79	0.35	0.11	39.25	57.68	-18.43	QP
0.408	34.81	0.35	0.11	35.27	47.68	-12.41	Average
1.071	37.26	0.20	0.15	37.61	56.00	-18.39	QP
1.071	29.79	0.20	0.15	30.14	46.00	-15.86	Average
1.338	39.21	0.20	0.16	39.57	56.00	-16.43	QP
1.338	30.99	0.20	0.16	31.35	46.00	-14.65	Average
4.501	42.68	0.20	0.17	43.05	56.00	-12.95	QP
4.501	29.72	0.20	0.17	30.09	46.00	-15.91	Average
5.653	33.72	0.20	0.18	34.10	60.00	-25.90	QP
5.653	24.98	0.20	0.18	25.36	50.00	-24.64	Average

Notes:

1. An initial pre-scan was performed on the live and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

7.1.3 Harmonics Test Results

Test Requirement:	ETSI EN 301 489-17/-52/-3, EN55032, EN 61000-3-2
Test Method:	N/A: See Remark Below
Remark:	<p>There is no need for Harmonics test to be performed on this product (rated power is less than 75W) in accordance with EN 61000-3-2. For further details, please refer to Clause 7, Note 1 of EN 61000-3-2</p> <p>Which states:</p> <p>“For the following categories of equipment limits are not specified in this edition of the standard.</p> <p>Note 1: Equipment with a rated power of 75W or less, other than lighting equipment.”</p>

7.1.4 Flicker Test Results

Test Requirement:	ETSI EN 301 489-17/-52/-3, EN55032, EN 61000-3-3			
Test Method:	EN 61000-3-3			
Class/Severity:	Clause 5 of EN 61000-3-3			
Measurement Time:	10 min			
Detector:	As per EN 61000-3-3			
Test Instruments:	Temp.:	24 °C	Humid.:	51% Press.: 1 010mbar
Test Instruments:	Refer to section 6.0 for details			
Test mode:	Refer to section 5.2 for details			
Test results:	Pass			

Measurement Data:


	EUT values	Limit	Result
Pst	0.028	1.00	PASS
dc [%]	0.011	3.30	PASS
dmax [%]	0.058	4.00	PASS
dt [s]	0.000	0.50	PASS

7.2 Immunity

Performance Criteria of ETSI EN 301 489-17/-52/-3 clause 6	
Continuous phenomena applied to transmitters (CT)	<ol style="list-style-type: none"> 1. During the test, the uplink speech output level shall be at least 35 dB less than the previously recorded reference levels, when measured through an audio band pass filter of width 200 Hz, centred on 1 kHz (audio breakthrough check). 2. At the conclusion of the test, the EUT shall operate as intended with no loss of user control functions or stored data, and the communication link shall have been maintained. 3. In addition to confirming the above performance during a call, the test shall also be performed in idle mode, and the transmitter shall not unintentionally operate.
Transient phenomena applied to Transmitters (TT)	<ol style="list-style-type: none"> 1. At the conclusion of each exposure the EUT shall operate with no user noticeable loss of the communication link. 2. At the conclusion of the total test comprising the series of individual exposures, the EUT shall operate as intended with no loss of user control functions or stored data, as declared by the manufacturer, and the communication link shall have been maintained. 3. In addition to confirming the above performance during a call, the test shall also be performed in idle mode, and the transmitter shall not unintentionally operate.
Continuous phenomena applied to Receivers (CR)	<ol style="list-style-type: none"> 1. During the test, the RXQUAL of the downlink shall not exceed the value of three, measured during each individual exposure in the test sequence. 2. During the test, the downlink speech output level shall be at least 35 dB less than the previously recorded reference levels, when measured through an audio band pass filter of width 200 Hz, centred on 1 kHz (audio breakthrough check). 3. At the conclusion of the test, the EUT shall operate as intended with no loss of user control the The communication link shall have been maintained.
Transient phenomena applied to Receivers (TR)	<ol style="list-style-type: none"> 1. At the conclusion of each exposure the EUT shall operate with no user noticeable loss of the communication link. 2. At the conclusion of the total test comprising the series of individual exposures, the EUT shall operate as intended with no loss of user control functions or stored data, as declared by the manufacturer, and the communication link shall have been maintained
Ancillary equipment tested on a stand alone basis	<p>If ancillary equipment is intended to be tested on a stand alone basis, the performance criteria described in the clauses above are not appropriate, then the manufacturer shall declare, for inclusion in the test report, his own specification for an acceptable level of performance or degradation of performance during and/or after the immunity tests. The performance specification shall be included in the product description and documentation.</p>

Performance Criteria of EN55035 clause 8	
Performance criterion A	The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Performance criterion B	<p>During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test.</p> <p>After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.</p> <p>If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.</p>
Performance criterion C	<p>Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed.</p> <p>Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.</p>

7.2.1 Electrostatic Discharge

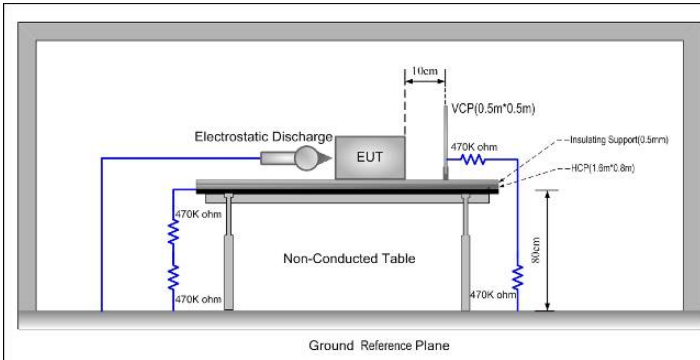Test Requirement:	ETSI EN 301 489-17/-52/-3, EN55035
Test Method:	EN 61000-4-2
Discharge Voltage:	Contact Discharge: $\pm 4\text{kV}$ Air Discharge: $\pm 2\text{kV}$, $\pm 4\text{kV}$, $\pm 8\text{kV}$ HCP/VCP: $\pm 4\text{kV}$
Polarity:	Positive & Negative
Number of Discharge:	Contact Discharge: Minimum 10 times at each test point, Air Discharge: Minimum 10 times at each test point.
Discharge Mode:	Single Discharge
Discharge Period:	1 second minimum
Limit:	Criteria B
Test setup:	
Test Procedure:	<p>Air discharge:</p> <ol style="list-style-type: none"> 1. The test was applied on non-conductive surfaces of EUT. 2. The round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT. 3. After each discharge, the discharge electrode was removed from the EUT. 4. The generator was re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. 5. This procedure was repeated until all the air discharge completed <p>Contact Discharge:</p> <ol style="list-style-type: none"> 1. The test was applied on conductive surfaces of EUT. 2. the generator was re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. 3. the tip of the discharge electrode was touch the EUT before the discharge switch was operated. <p>Indirect discharge for horizontal coupling plane</p> <ol style="list-style-type: none"> 1. At least 10 single discharges shall be applied at the front edge of each HCP opposite the centre point of each unit of the EUT and 0.1m from the front of the EUT. 2. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge. 3. Consideration should be given to exposing all sides of the EUT.

	Indirect discharge for vertical coupling plane 1. At least 10 single discharges were applied to the center of one vertical edge of the coupling plane. 2. The coupling plane, of dimensions 0.5m X 0.5m, was placed parallel to, and positioned at a distance of 0.1m from the EUT. 3. Discharges were applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.
Test environment:	Temp.: 24 °C Humid.: 51% Press.: 1 010mbar
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Record:

Measurement Record:				
Test points:	I: Metal Cover			
	II: N/A			
Direct discharge				
Discharge Voltage (KV)	Type of discharge	Test points	Observations Performance	Result
± 4	Contact	I	A	Pass
± 2, ± 4, ± 8	Air	II	N/A	N/A
Indirect discharge				
Discharge Voltage (KV)	Type of discharge	Test points	Observation Performance	Result
± 4	HCP-Bottom/Top/ Front/Back/Left/Right	Edge of the HCP	A	Pass
± 4	VCP-Front/Back /Left/Right	Center of the VCP	A	Pass


Remark:

A: No degradation in performance of the EUT was observed.

B: Lose some function during test, after test the EUT can automatically recover.

N/A : Not applicable

7.2.2 Radiated Immunity

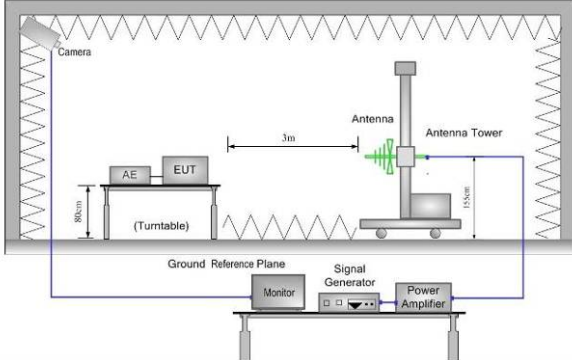Test Requirement:	ETSI EN 301 489-17/-52/-3, EN55035
Test Method:	EN 61000-4-3
Frequency range:	80MHz to 6GHz
Test Level:	3V/m
Modulation:	80%, 1kHz Amplitude Modulation
Performance Criterion:	Criteria A
Test setup:	
Test Procedure:	<ol style="list-style-type: none"> 1. For table-top equipment, the EUT was placed in the chamber on a non-conductive table 0.8m high. For arrangement of floor-standing equipment, the EUT was mounted on a non-conductive support 0.1m above the supporting plane. For human body-mounted equipment, the EUT may be tested in the same manner as table top items. 2. If possible, a minimum of 1 m of cable is exposed to the electromagnetic field. Excess length of cables interconnecting units of the EUT shall be bundled low-inductively in the approximate center of the cable to form a bundle 30 cm to 40 cm in length. 3. The EUT was initially placed with one face coincident with the calibration plane. The EUT face being illuminated was contained within the UFA (Uniform Field Area). 4. The frequency ranges to be considered were swept with the signal modulated and pausing to adjust the RF signal level or to switch oscillators and antennas as necessary. Where the frequency range was swept incrementally, the step size was not exceed 1 % of the preceding frequency value. 5. The dwell time of the amplitude modulated carrier at each frequency was not be less than the time necessary for the EUT to be exercised and to respond, and was not less than 0,5 s. 6. The test normally was performed with the generating antenna facing each side of the EUT. 7. The polarization of the field generated by each antenna necessitates testing each selected side twice, once with the antenna positioned vertically and again with the antenna positioned horizontally. 8. The EUT was performed in a configuration to actual installation conditions, a video camera and/or a audio monitor were used to monitor the performance of the EUT.
Test environment:	Temp.: 25 °C Humid.: 52% Press.: 1 010mbar

Test Instruments:	Refer to section 6.0 for details
Test results:	Pass


Measurement result:

Frequency	Level	Modulation	Antenna Polarization	EUT Face	Observations (Performance Criterion)
80 MHz-6GHz	3 V/m	1 kHz, 80 % Amp. Mod, 1% increment	V	Front	A
			H		A
			V	Rear	A
			H		A
			V	Left	A
			H		A
			V	Right	A
			H		A
			V	Top	A
			H		A
			V	Bottom	A
			H		A

Remarks:

A: Normal performance within the specification limits.

7.2.3 Radio frequency common mode

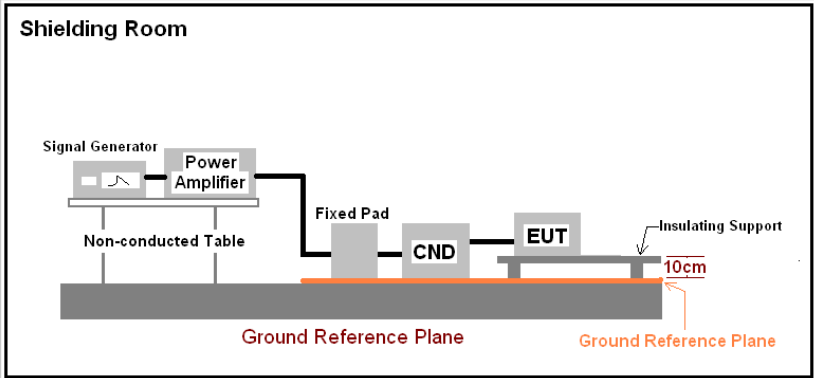Test Requirement:	ETSI EN 301 489-17/-52/-3, EN55035
Test Method:	EN 61000-4-6
Frequency range:	0.15MHz to 80MHz
Test Level:	3V rms on AC Ports (unmodulated emf into 150 Ω)
Modulation:	80%, 1kHz Amplitude Modulation
Performance Criterion:	Criteria A
Test setup:	
Test Procedure:	<ol style="list-style-type: none"> 1. Let the EUT work in test mode and test it. 2. The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible). 3. The disturbance signal described below is injected to EUT through CDN. 4. The EUT operates within its operational mode(s) under intended climatic conditions after power on. 5. The frequency range is swept from 0.150MHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1kHz sine wave. The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally; the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value. 6. Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.
Test environment:	Temp.: 24 $^{\circ}\text{C}$ Humid.: 51% Press.: 1 010mbar
Test Instruments:	Refer to section 6.0 for details
Test results:	Pass


Measurement Record::

Frequency	Injected Position	Test Level	Modulation	Step Size	Dwell Time	Observations (Performance Criterion)
150kHz to 80MHz	AC Main	3Vrms	80%, 1kHz Amp. Mod.	1%	2s	A

Remark:

A: No loss of function was observed.

7.2.4 Electrical Fast Transients

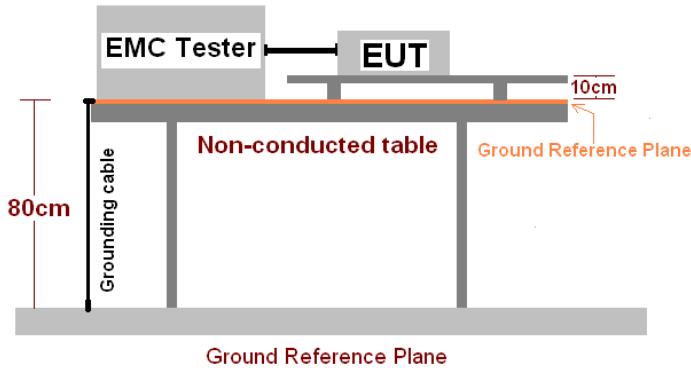Test Requirement:	ETSI EN 301 489-17/-52/-3, EN55035
Test Method:	EN 61000-4-4
Test Level:	1.0kV on AC port
Polarity:	Positive & Negative
Repetition Frequency:	5kHz
Burst Duration:	15ms
Burst Period:	300ms
Test Duration:	2 minute per level & polarity
Performance Criterion:	B
Test setup:	 <p>The diagram illustrates the test setup. An EMC Tester is connected to an EUT (Equipment Under Test) via a cable. Both are placed on a non-conducted table. A grounding cable is connected to the table, which is 80cm high. A ground reference plane is shown at the base of the table, and another is shown at the top of the table, 10cm from the EUT.</p>
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT and its simulators were placed on the ground reference plane and were insulated from it by a wood support 0.1m + 0.01m thick. The ground reference plane was 1m*1m metallic sheet with 0.65mm minimum thickness. 2. This reference ground plane was project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane was more than 0.5m. 3. All cables to the EUT was placed on the wood support, cables not subject to EFT/B was routed as far as possible from the cable under test to minimize the coupling between the cables. 4. The length of the signal and power lines between the coupling device and the EUT is 0.5m <p>Test on Signal Ports, Telecommunication Ports and Control Ports: The EFT interference signal is through a coupling clamp device couples to the signal and control lines of the EUT with burst noise for 2 minutes.</p> <p>Test on power supply ports:</p> <ol style="list-style-type: none"> 1. The EUT is connected to the power mains through a coupling device that directly couples the EFT/B interference signal. 2. Each of the Line and Neutral conductors is impressed with burst noise for 2 minutes.
Test environment:	Temp.: 26 °C Humid.: 54% Press.: 1 010mbar
Test Instruments:	Refer to section 6.0 for details

Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Record:

Lead under Test	Level (\pm kV)	Coupling Direct/Clamp	Observations (Performance Criterion)	Result
L	± 1.0	Direct	A	Pass
N	± 1.0	Direct	A	Pass
L-N	± 1.0	Direct	A	Pass

Remark:

A: No loss of function was observed.

7.2.5 Surge

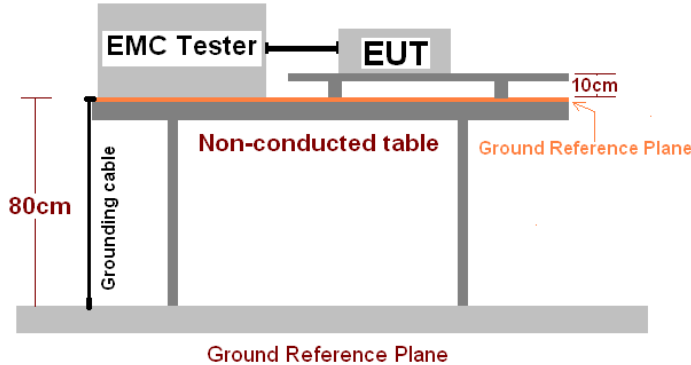Test Requirement:	ETSI EN 301 489-17/-52/-3, EN55035
Test Method:	ETSI EN 61000-4-5
Test Level:	±1kV Live to Neutral: Differential mode
Polarity:	Positive & Negative
Test Interval:	60s between each surge
No. of surges:	5 positive, 5 negative at 0°, 90°, 180°, 270°.
Performance Criterion:	B
Test setup:	 <p>The diagram illustrates the test setup. An EMC Tester is connected to an EUT (Equipment Under Test) via a cable. Both are placed on a Non-conducted table. A Grounding cable is connected to the table, which is 80cm high. A Ground Reference Plane is indicated at the base of the table. A 10cm distance is marked between the EUT and the table surface.</p>
Test Procedure:	<ol style="list-style-type: none"> 1. For line-to-line coupling mode, provide a 1kV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points, and for active line / neutral lines to ground are same except test level is 2kV. 2. At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are applied during test. 3. Different phase angles are done individually. 4. Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.
Test environment:	Temp.: 26 °C Humid.: 53% Press.: 1 010mbar
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Record:

Location	Level(kV)	Pulse No	Surge Interval	Phase(deg)	Observations (Performance Criterion)
L-N	± 1	5	60s	0°	A
				90°	A
				180°	A
				270°	A

Remark:

A: No loss of function was observed.

7.2.6 Voltage Dip and Voltage Interruptions

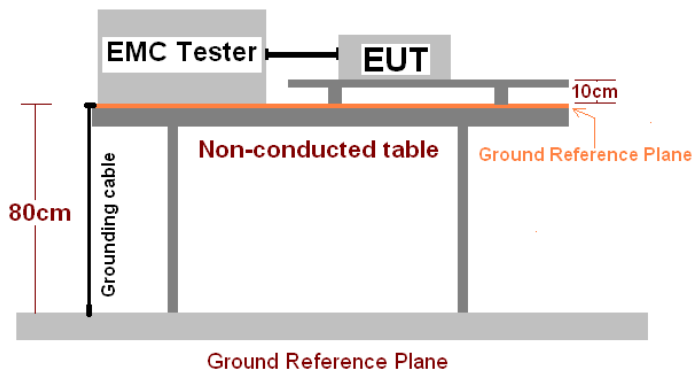Test Requirement:	ETSI EN 301 489-17/-52/-3, EN55035
Test Method:	EN 61000-4-11
Test Level:	0% of VT(Supply Voltage) for 0.5 period 0% of VT(Supply Voltage) for 1.0 period 70% of VT(Supply Voltage) for 25 period 0% of VT(Supply Voltage) for 250 period
No. of Dips / Interruptions:	3 per Level
Performance Criterion:	0% VD, 0.5 period----Performance criterion: B 0% VD, 1 period----Performance criterion: B 70% VD, 25 period----Performance criterion: C 0% VI, 250 period----Performance criterion: C
Test setup:	 <p>The diagram illustrates the test setup. An EMC Tester and the Equipment Under Test (EUT) are positioned on a non-conducted table. The table's height is indicated as 80cm from the ground reference plane. The EUT is placed 10cm above the ground reference plane. A grounding cable is connected to the table. The ground reference plane is shown at the bottom of the setup.</p>
Test Procedure:	1>.The EUT and test generator were setup as shown on above setup photo. 2>.The interruptions are introduced at selected phase angles with specified duration. 3>.Record any degradation of performance.
Test environment:	Temp.: 26 °C Humid.: 53% Press.: 1 010mbar
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Record:

Test Level % U_T	Duration (Periods)	Phase angle	No of dropout	Time between dropout	Observations (Performance Criterion)
0	0.5	0°, 90°, 180°, 270°	3	10s	A
0	1	0°, 90°, 180°, 270°	3	10s	A
70	25	0°, 90°, 180°, 270°	3	10s	B
0	250	0°, 90°, 180°, 270°	3	10s	B


Remark:

A: No loss of function was observed.

B: During the test, the EUT stoped charging, after the experiment, it can return to normal automatically.

8 Test Setup Photo

Radiated Emission

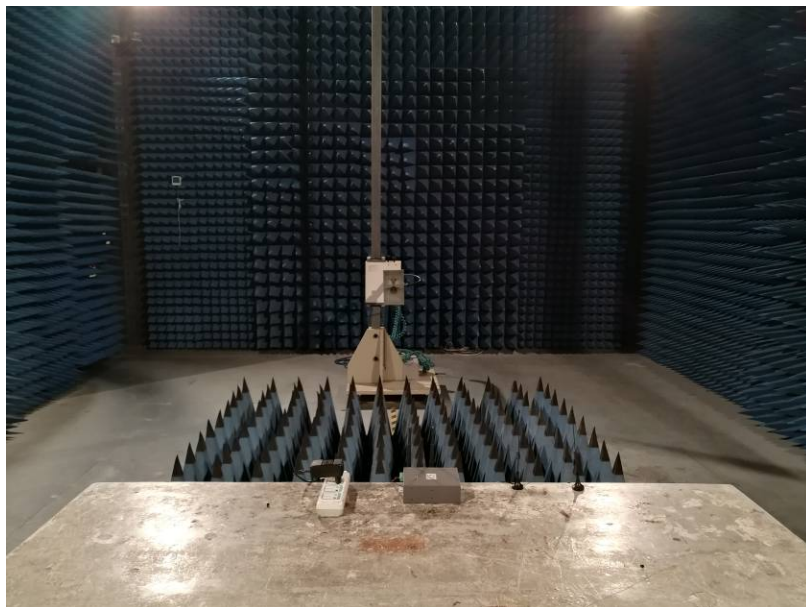

Conducted Emission



Flicker




ESD






Surges/EFT/V-dips






9 EUT Constructional Details

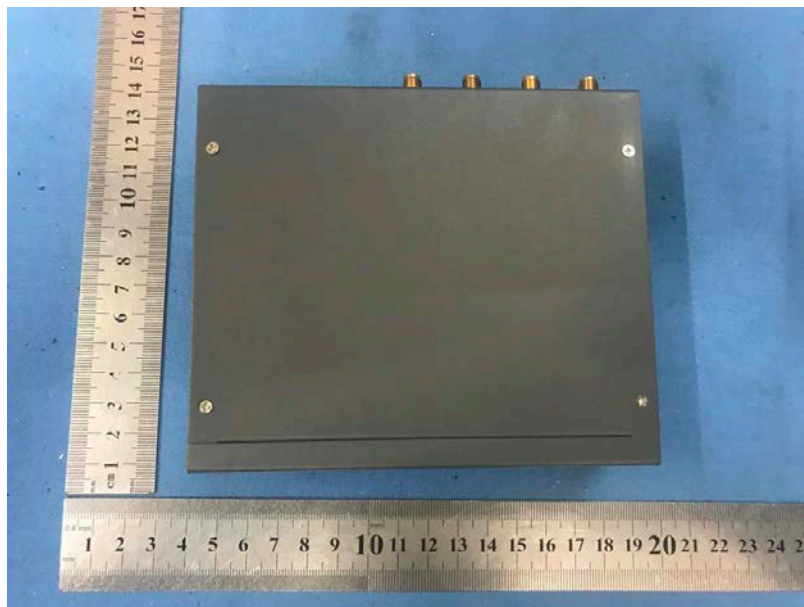


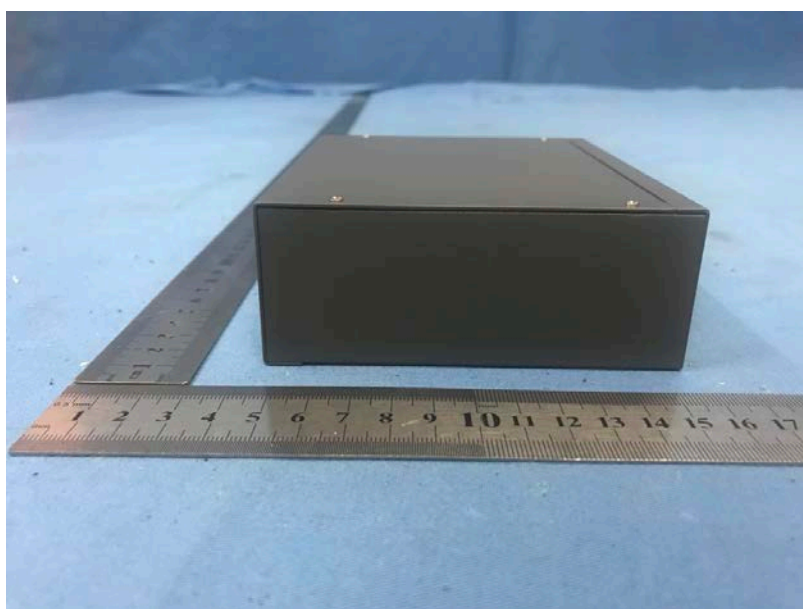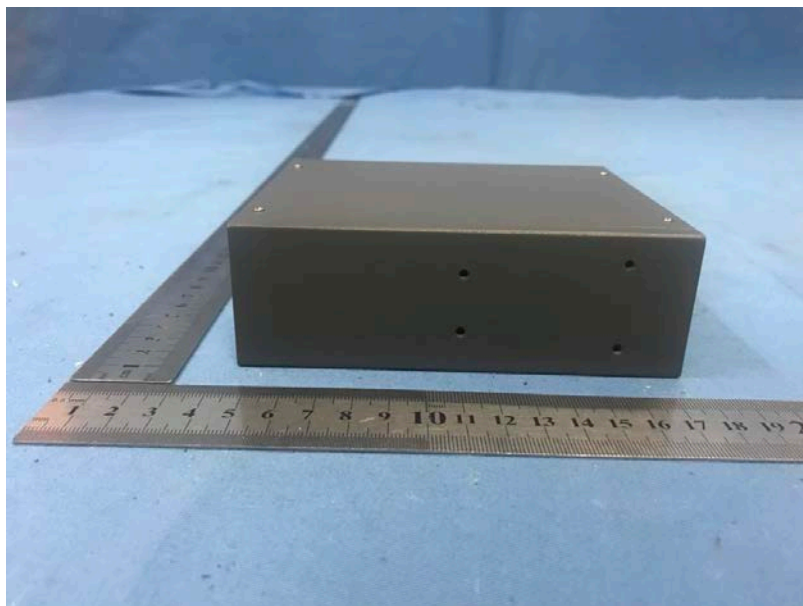


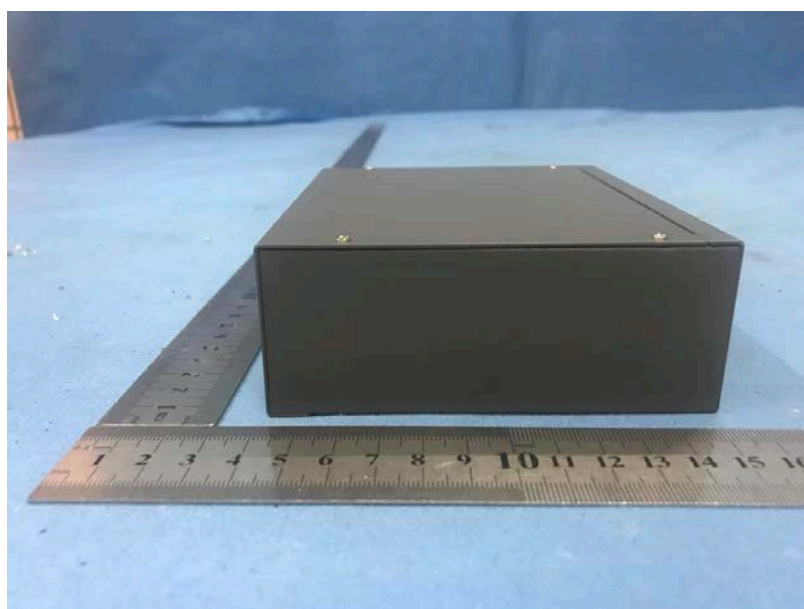


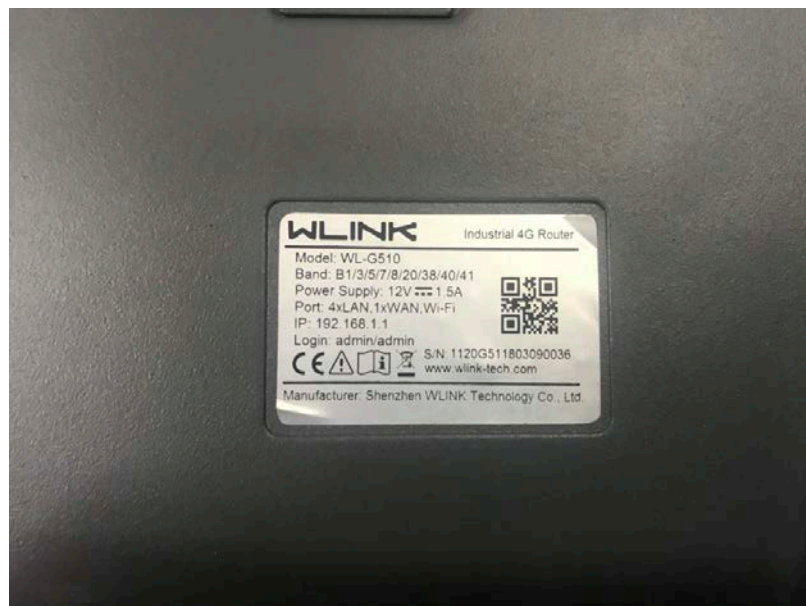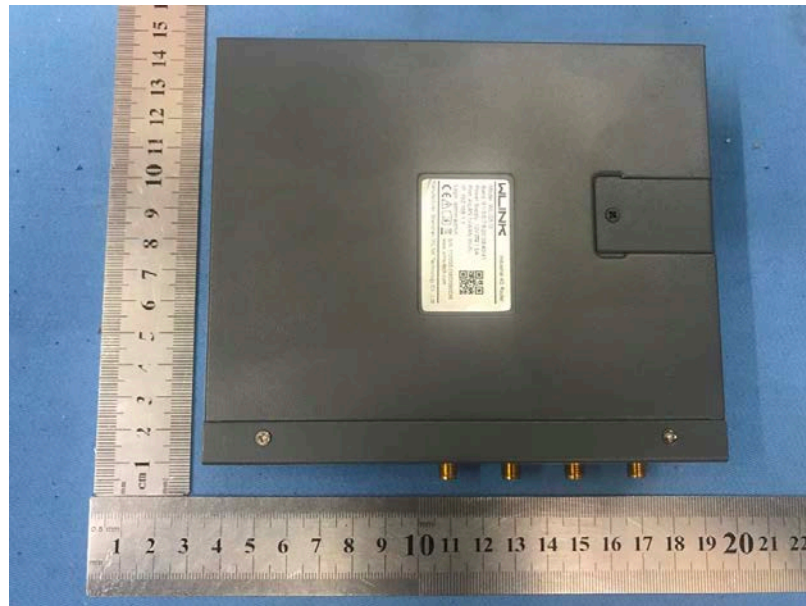

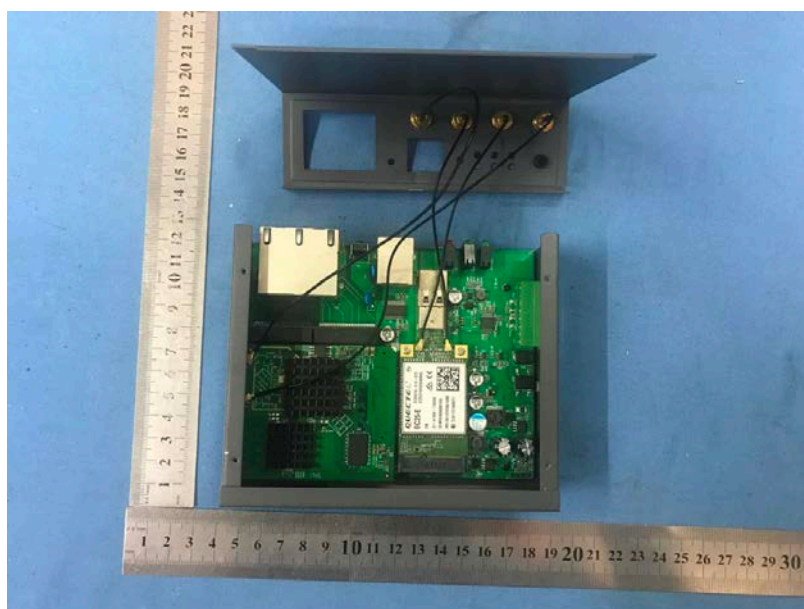


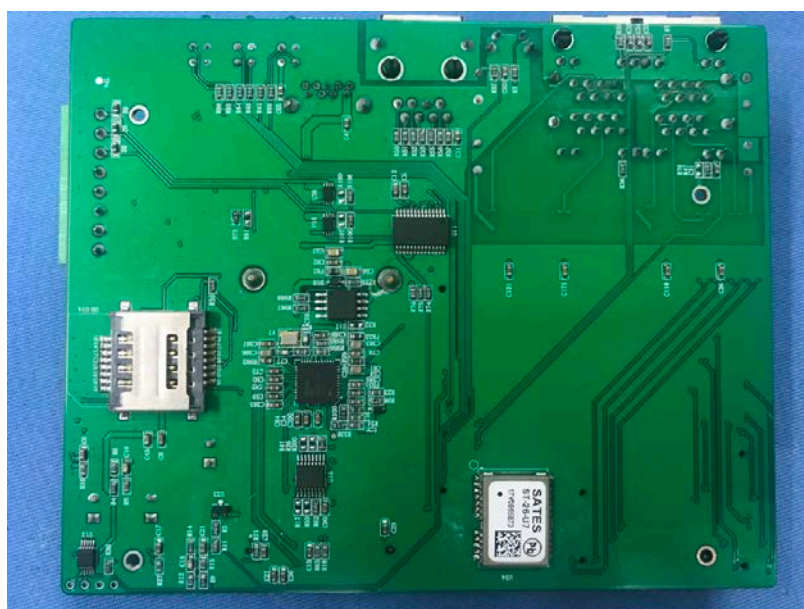



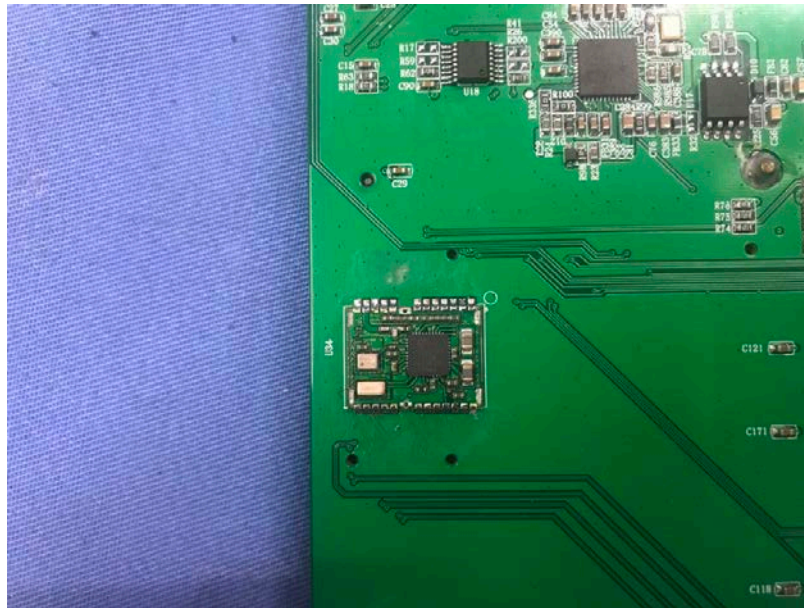


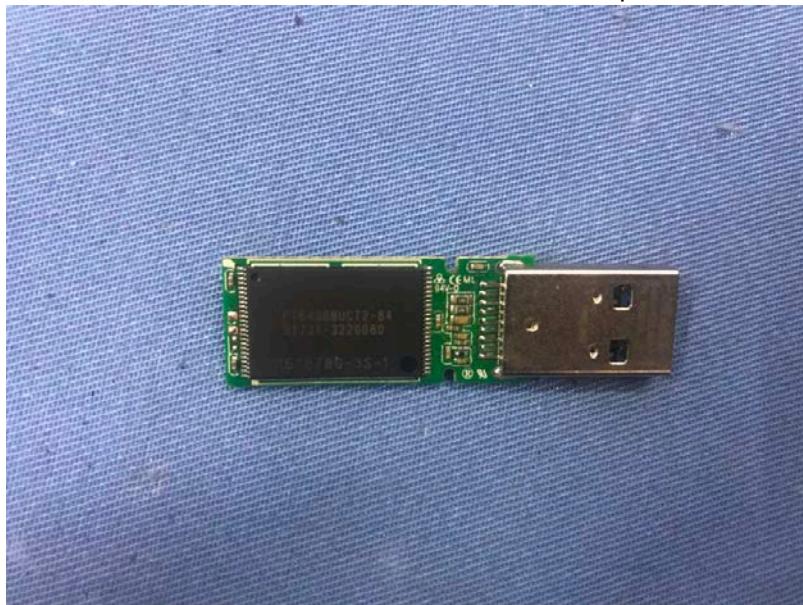






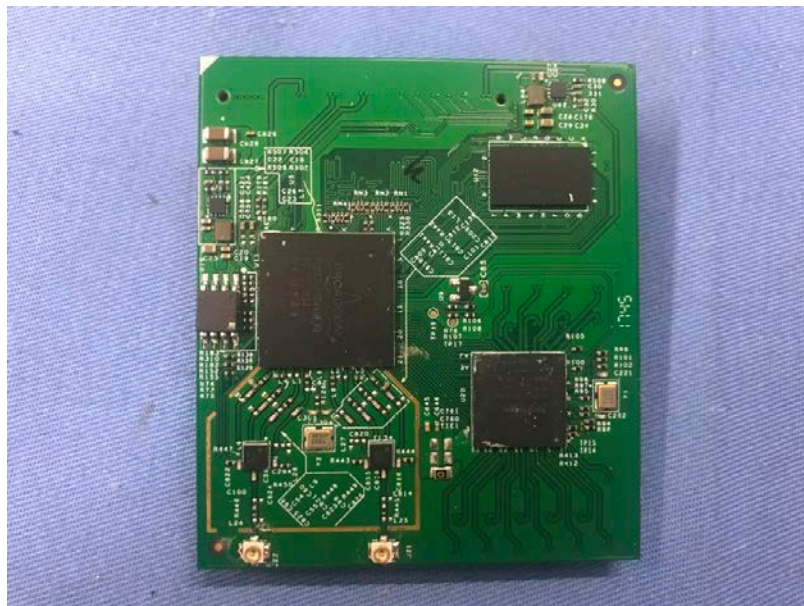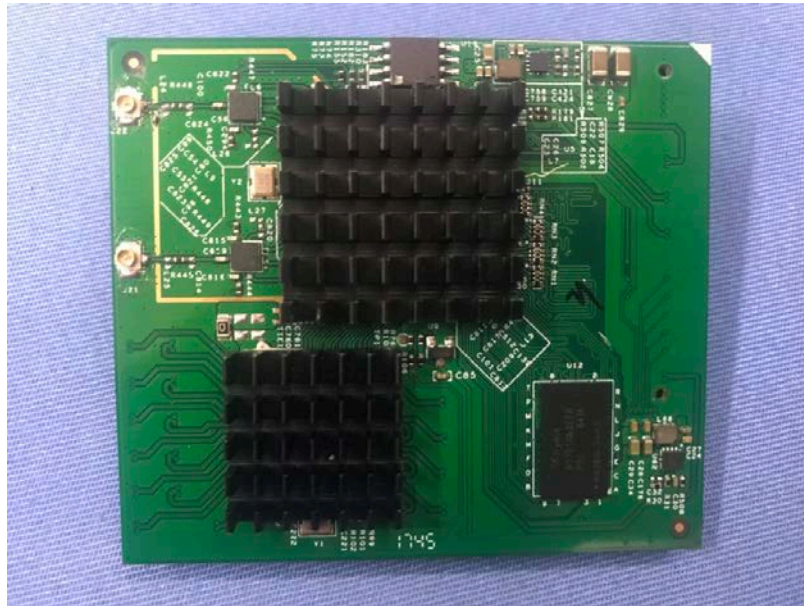

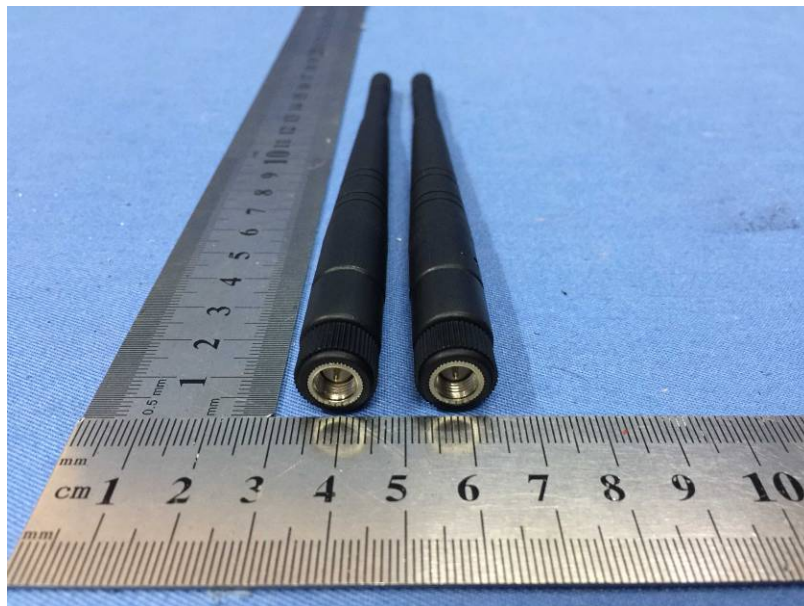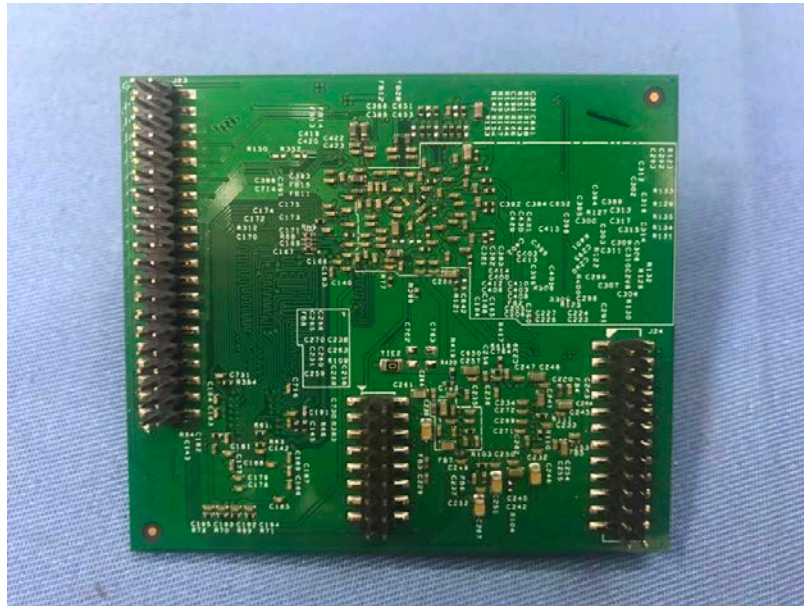

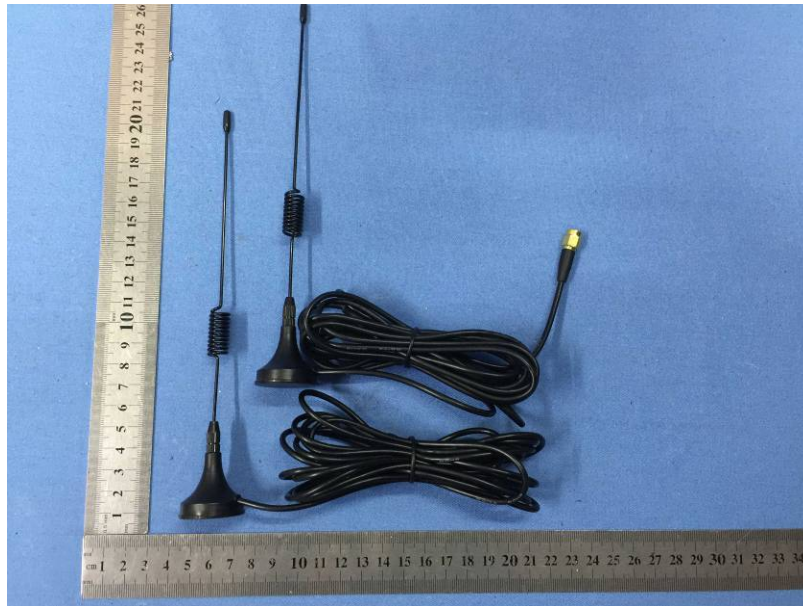



-----End-----